
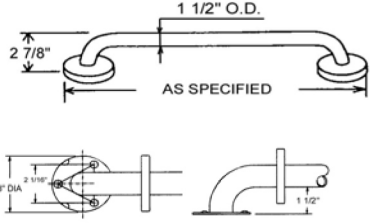

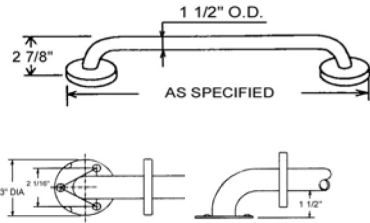

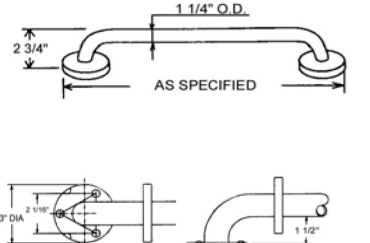


# BETTER HOME PRODUCTS

## HEAVY DUTY STAINLESS STEEL GRAB BARS

Available in 12", 18", 24", 30", 36", 42" & 48" Lengths ( C-C)

<p><b>HC SERIES</b></p>  <p><b>SS Finish</b></p>		<p><b>BHP 1 1/2" O.D. Bar, Concealed Screw</b>          Type 304 stainless steel, satin finish. Surface mount, concealed screw application. Packed with 6Pcs #10x2" stainless steel mounting screws.  <b>Bars</b> – 1 1/2" O.D., 0.050" (18 gauge) wall thickness type 304 stainless steel. 1 1/2" wall clearance  <b>Flanges</b> - 0.078" (14 gauge) type 304 stainless steel and are heliarc-welded to tubing. Twist-lock cover flanges are of 0.035" (20 gauge) stainless steel</p>
<p><b>DBHC SERIES</b></p>  <p><b>Dark Bronze Finish</b></p>		<p><b>BHP 1 1/2" O.D. Bar, Concealed Screw</b>          Type 304 stainless steel, satin finish. Surface mount, concealed screw application. Packed with 6Pcs #10x2" stainless steel mounting screws.  <b>Bars</b> – 1 1/2" O.D., 0.050" (18 gauge) wall thickness type 304 stainless steel. 1 1/2" wall clearance  <b>Flanges</b> - 0.078" (14 gauge) type 304 stainless steel and are heliarc-welded to tubing. Twist-lock cover flanges are of 0.035" (20 gauge) stainless steel</p>
<p><b>QC SERIES</b></p>  <p><b>SS Finish</b></p>		<p><b>BHP 1 1/4" O.D. Bar, Concealed Screw</b>          Type 304 stainless steel, satin finish. Surface mount, concealed screw application. Packed with 6Pcs #10x2" stainless steel mounting screws.  <b>Bars</b> – 1 1/4" O.D., 0.050" (18 gauge) wall thickness type 304 stainless steel. 1 1/2" wall clearance  <b>Flanges</b> - 0.078" (14 gauge) type 304 stainless steel and are heliarc-welded to tubing. Twist-lock cover flanges are of 0.035" (20 gauge) stainless steel</p>

**MEETS ADA CODE REQUIREMENTS  
 FOR FORCES UP TO 500 LBS**